

Thank you for your recent enquiry, we hope you find the following information useful. We look forward to hearing from you if Seaflex can be of service; please do not hesitate to contact us if you require further information or a prompt quotation.

#### FEATURES OF THE 250kg ALB:


- All Seaflex Air Lift Bags (ALBs) comply with the currently accepted offshore standard; **IMCA D016-Air Lift Bags**. Units are designed and type tested to a safety factor in excess of the required 5:1 and constructed under **BS EN ISO 9001:2000** controlled procedures independently assessed and certified by **Lloyds Register Quality Assurance**.
- Log Books are issued with every ALB that contain all details, information and procedures required by IMCA D016- Air Lift Bags, and facilitate keeping the required records by the end user.
- Canopy fabric is high tensile PVC coated polyester with HF welded seams for maximum strength. This advanced 'performance fabric' has been well proven over the last ten years and maintains its strength, flexibility and weldability far longer than normal fabrics.
- Four strop attachment points distribute strop loads into the inside of the high tensile fabric canopy. The resulting smooth exterior and weight reduction make this easy to use by salvors who also appreciate the extreme low inflated height. These bags are used extensively by divers for handling heavy subsea tools and equipment.
- The best materials, good design and meticulous manufacturing make Seaflex ALBs the first choice for end users requiring safety, ease of use and best value for through life cost.

#### COMPONENTS LIST:

COMPONENT PART No	COMPONENT DESCRIPTION	COMPONENT DESCRIPTION	QUANTITY PER BAG
SFX-0.25ALB/1	Canopy	PVC coated HT polyester 2x2 Panama 1010gms/m. HF welded seams.	1
SFX-0.25ALB/2	Masterlink	Fram 11B4 SWL 2.1t S.F 8:1	1
SFX-0.25ALB/3	Shackles	1.0t Galvanised Screw Pin Bow Shackles US FED Spec. RR-C-271	1
SFX-0.25ALB/4	Main Strops	Polyester Sling Webbing – 25mm	4
SFX-0.25ALB/5	Strop Attachment	Welded & Sewn - Internal	4
SFX-0.25ALB/6	¾" Globe Valve filling & discharge	Non corrosive, quarter turn on/off Terminates ¾" BSP male thread	1
SFX-0.25ALB/7	Dump Valves	A10(M) operated from single lanyard	1
SFX-0.25ALB/8	DV Lanyard	5mm polyester line with galvanised ballast ring	1.5m
SFX-0.25ALB/9	Detangler	HiViz yellow 25mm webbing	1
SFX-0.25ALB/10	Top Restraint	Rope Handle on Carmo Eyes	1

# SEAFLEX STANDARD PRODUCT

## 250kg AIR LIFT BAG (ALB)

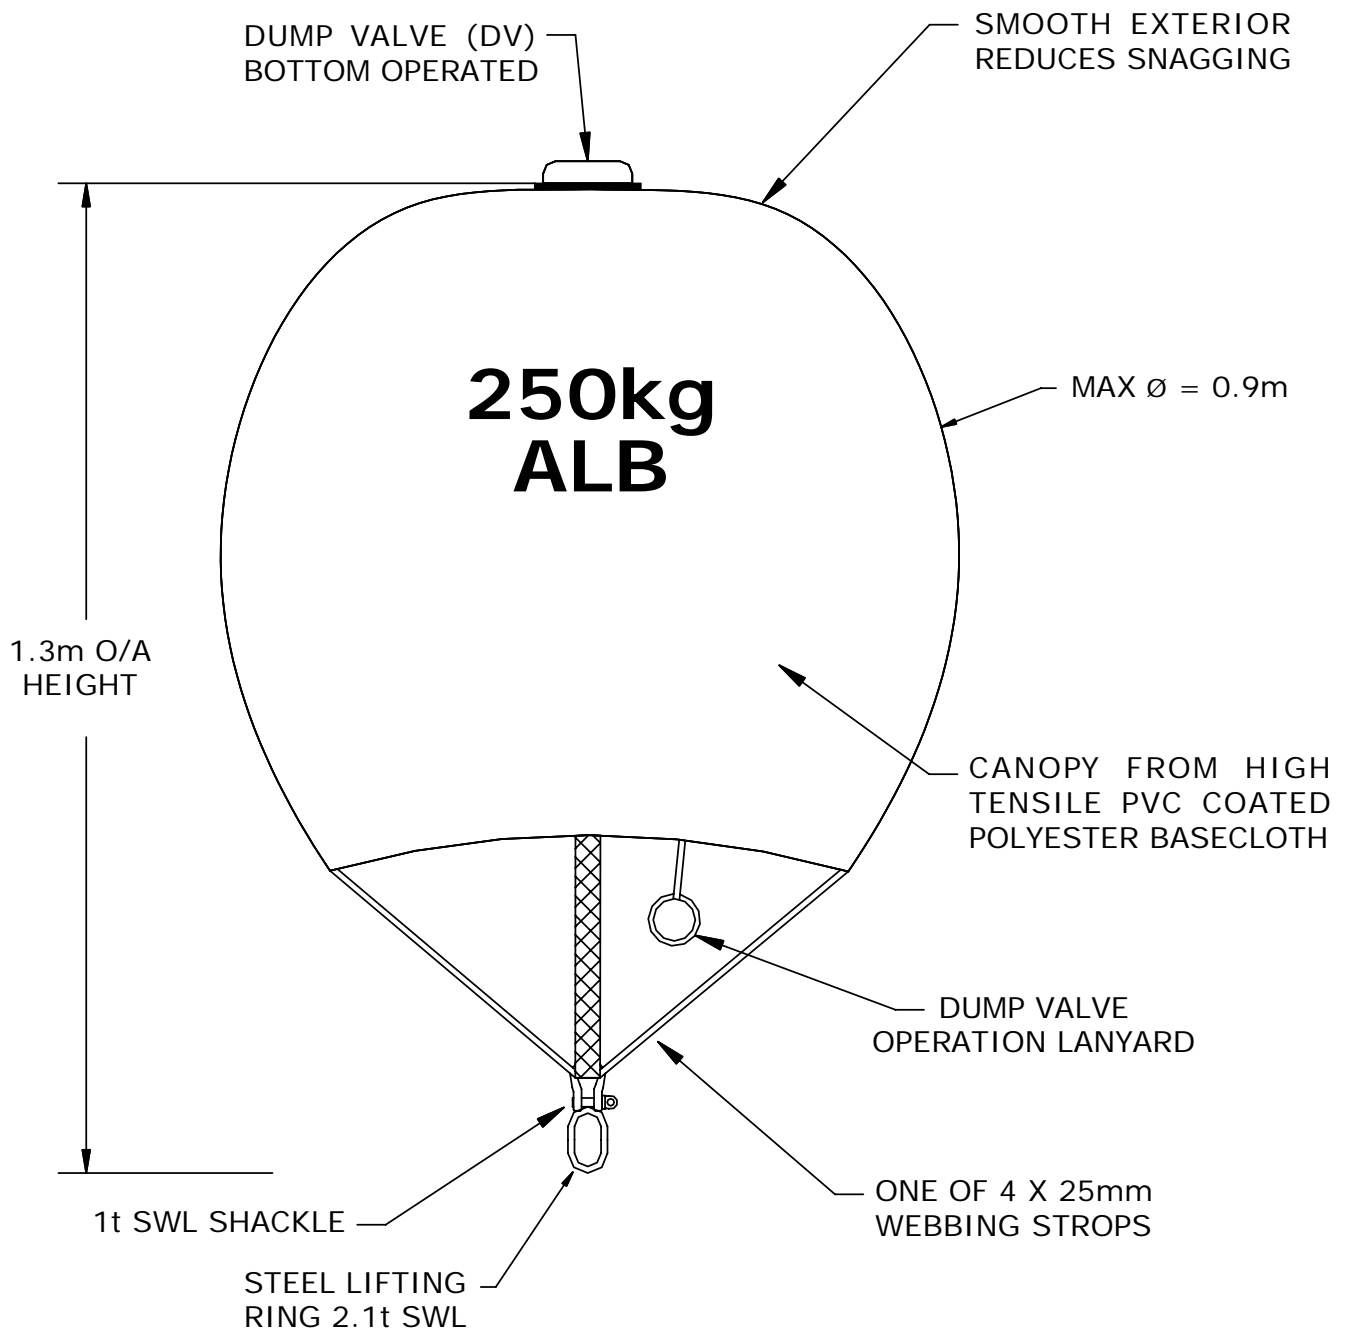

THE INTELLECTUAL CONTENT OF THIS  
DRAWING IS THE COPYRIGHT OF  
SEAFLEX LTD. CONTENTS ARE ACCURATE  
AT TIME OF GOING TO PRESS, BUT MAY  
CHANGE WITHOUT NOTICE

DO NOT SCALE

**250kg ALB**

Drg. No. 391002/1MLB Issue A

**SEAFLEX Ltd**

SAMUEL WHITES, COWES, ENGLAND, PO31 7RA  
TEL: +441 983 290 525 FAX: +441 983 290 853