


2t SEAFLEX MONO BUOYANCY UNIT (MBU)


SINGLE POINT LIFTING ATTACHMENT EYE.
USE ONLY 2T SWL SHACKLES (6:1 SF)

ONE OF 2 x INFLATION/DEFLATION VALVES (IDVs)
TERMINATES IN $\frac{3}{4}$ " BSP MALE THREAD

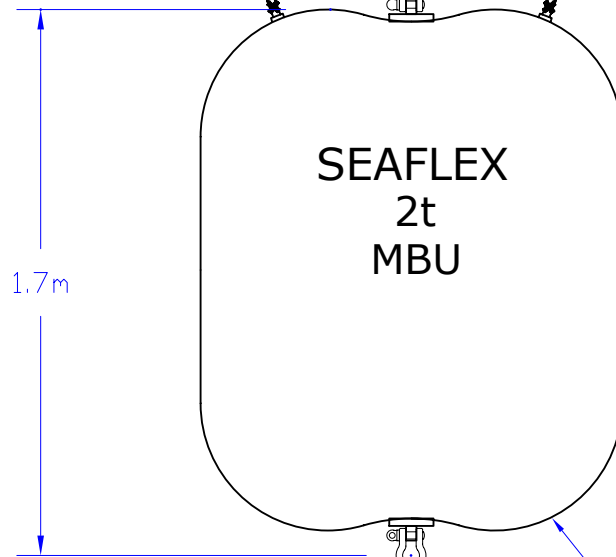

1.7m

SEAFLEX
2t
MBU

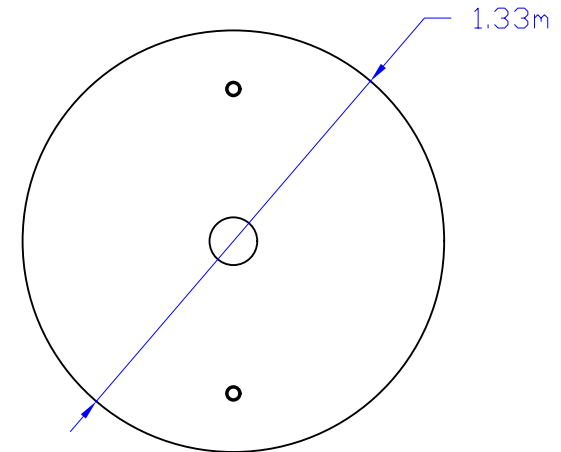

1.33m

SINGLE POINT LOAD ATTACHMENT EYE.
USE ONLY 2T SWL SHACKLES (6:1 RF)

2 x PRESSURE RELIEF VALVES
(2.5psi - 0.16bar)

THE LIFTING SHACKLE ON THE TOP IS CONNECTED TO THE
LOAD SHACKLE ON THE BOTTOM WITH A SWL OF 2t. SO
A CRANE MAY BE USED TO LIFT THE MBU FROM THE TOP
WITH A 3t LOAD SUSPENDED ON THE BOTTOM SHACKLE.

2t Mono Buoyancy Unit (MBU)
Drg. No. 230107/1MLB Issue A
SEAFLEX Ltd
SAMUEL WHITES, COWES, ENGLAND, PO31 7RA. TEL: +441 983 290 525 FAX: +441 983 2905 853