

Thank you for your recent enquiry, we hope you find the following information useful. We look forward to hearing from you if Seaflex can be of service; please do not hesitate to contact us if you require further information or a prompt quotation.

#### FEATURES OF THE 35t ALB:


- All Seaflex Air Lift Bags (ALBs) comply with the currently accepted offshore standard; **IMCA D016-Air Lift Bags**. Units are designed and type tested to a safety factor in excess of the required 5:1 and constructed under **BS EN ISO 9001:2000** controlled procedures independently assessed and certified by **Lloyds Register Quality Assurance**.
- Log Books are issued with every ALB that contain all details, information and procedures required by IMCA D016- Air Lift Bags, and facilitate keeping the required records by the end user.
- Canopy fabric is high tensile PVC coated polyester with HF welded seams for maximum strength. This advanced 'performance fabric' has been well proven over the last ten years and maintains its strength, flexibility and weldability far longer than normal fabrics.
- Continuous over the top (OTT) strops eliminate complicated rigging arrangements in an area prone to damage and reduces the number of strop terminations by 50%. The unique Seaflex stainless steel crown flange secures a centrally mounted high capacity 2" dump valve for rapid discharge and diver control.
- The best materials, good design and meticulous manufacturing make Seaflex ALBs the first choice for end users requiring safety, ease of use and best value for through life cost.

#### COMPONENTS LIST:

COMPONENT PART No	COMPONENT DESCRIPTION	COMPONENT DESCRIPTION	QUANTITY PER BAG
SFX-35ALB/1	Canopy	PVC coated HT polyester 3x3 Panama 1650gms/m. HF welded seams.	1
SFX-35ALB/2	Masterlink Assembly	Grade 8 Quad assembly S-2016-8 SWL 40.8t Safety Factor 6:1	1
SFX-35ALB/3	Shackles	9.5t Galvanised Screw Pin Bow Shackles US FED Spec. RR-C-271	4
SFX-35ALB/4	Main Strops	Polyester Sling Webbing – 50mm Continuous 'Over the Top' (OTT) Strops	9 x 2
SFX-35ALB/5	¾" Globe Valve filling & discharge	Non corrosive, quarter turn on/off Terminates ¾" BSP male thread	1
SFX-35ALB/6	Dump Valves	BBDV centrally mounted within Crown Flange	1
SFX-35ALB/7	DV Lanyard	5mm polyester line with galvanised ballast ring	7m
SFX-35ALB/8	Detangler	HiViz yellow 25mm webbing	1
SFX-35ALB/9	Crown Flange	Stainless steel flange terminating in 2" high capacity dump valve	1
SFX-35ALB/10	Top Restraint	12mm Dynamo Nut	1

# SEAFLEX STANDARD PRODUCT

## 35t AIR LIFT BAG (ALB)

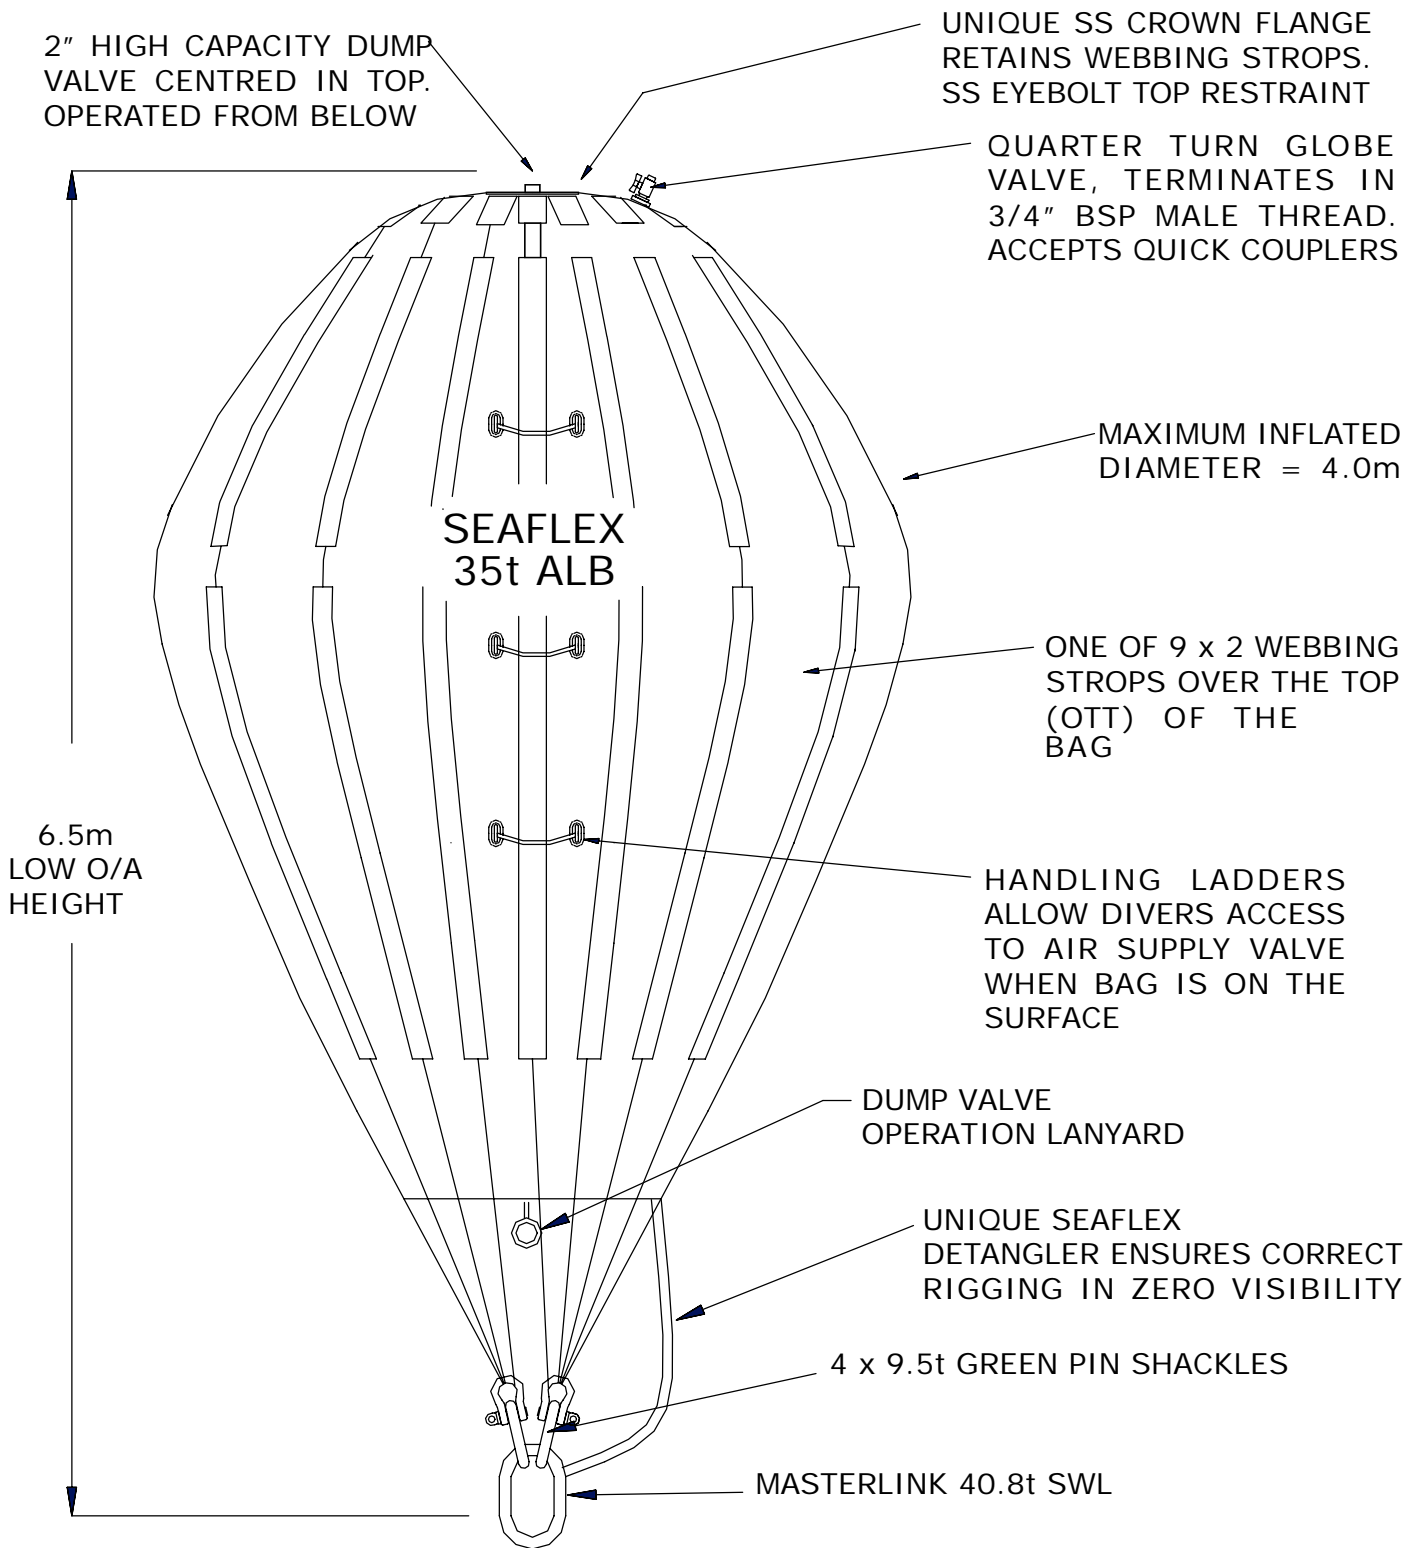

THE INTELLECTUAL CONTENT OF THIS DRAWING IS THE COPYRIGHT OF SEAFLEX LTD. CONTENTS ARE ACCURATE AT TIME OF GOING TO PRESS, BUT MAY CHANGE WITHOUT NOTICE

DO NOT SCALE

**35t AIR LIFT BAG (ALB)**

Drg. No. 461002/1MLB Issue A

**SEAFLEX Ltd**

SAMUEL WHITES, COWES, ENGLAND, PO31 7RA  
TEL: +441 983 290 525 FAX: +441 983 290 853