
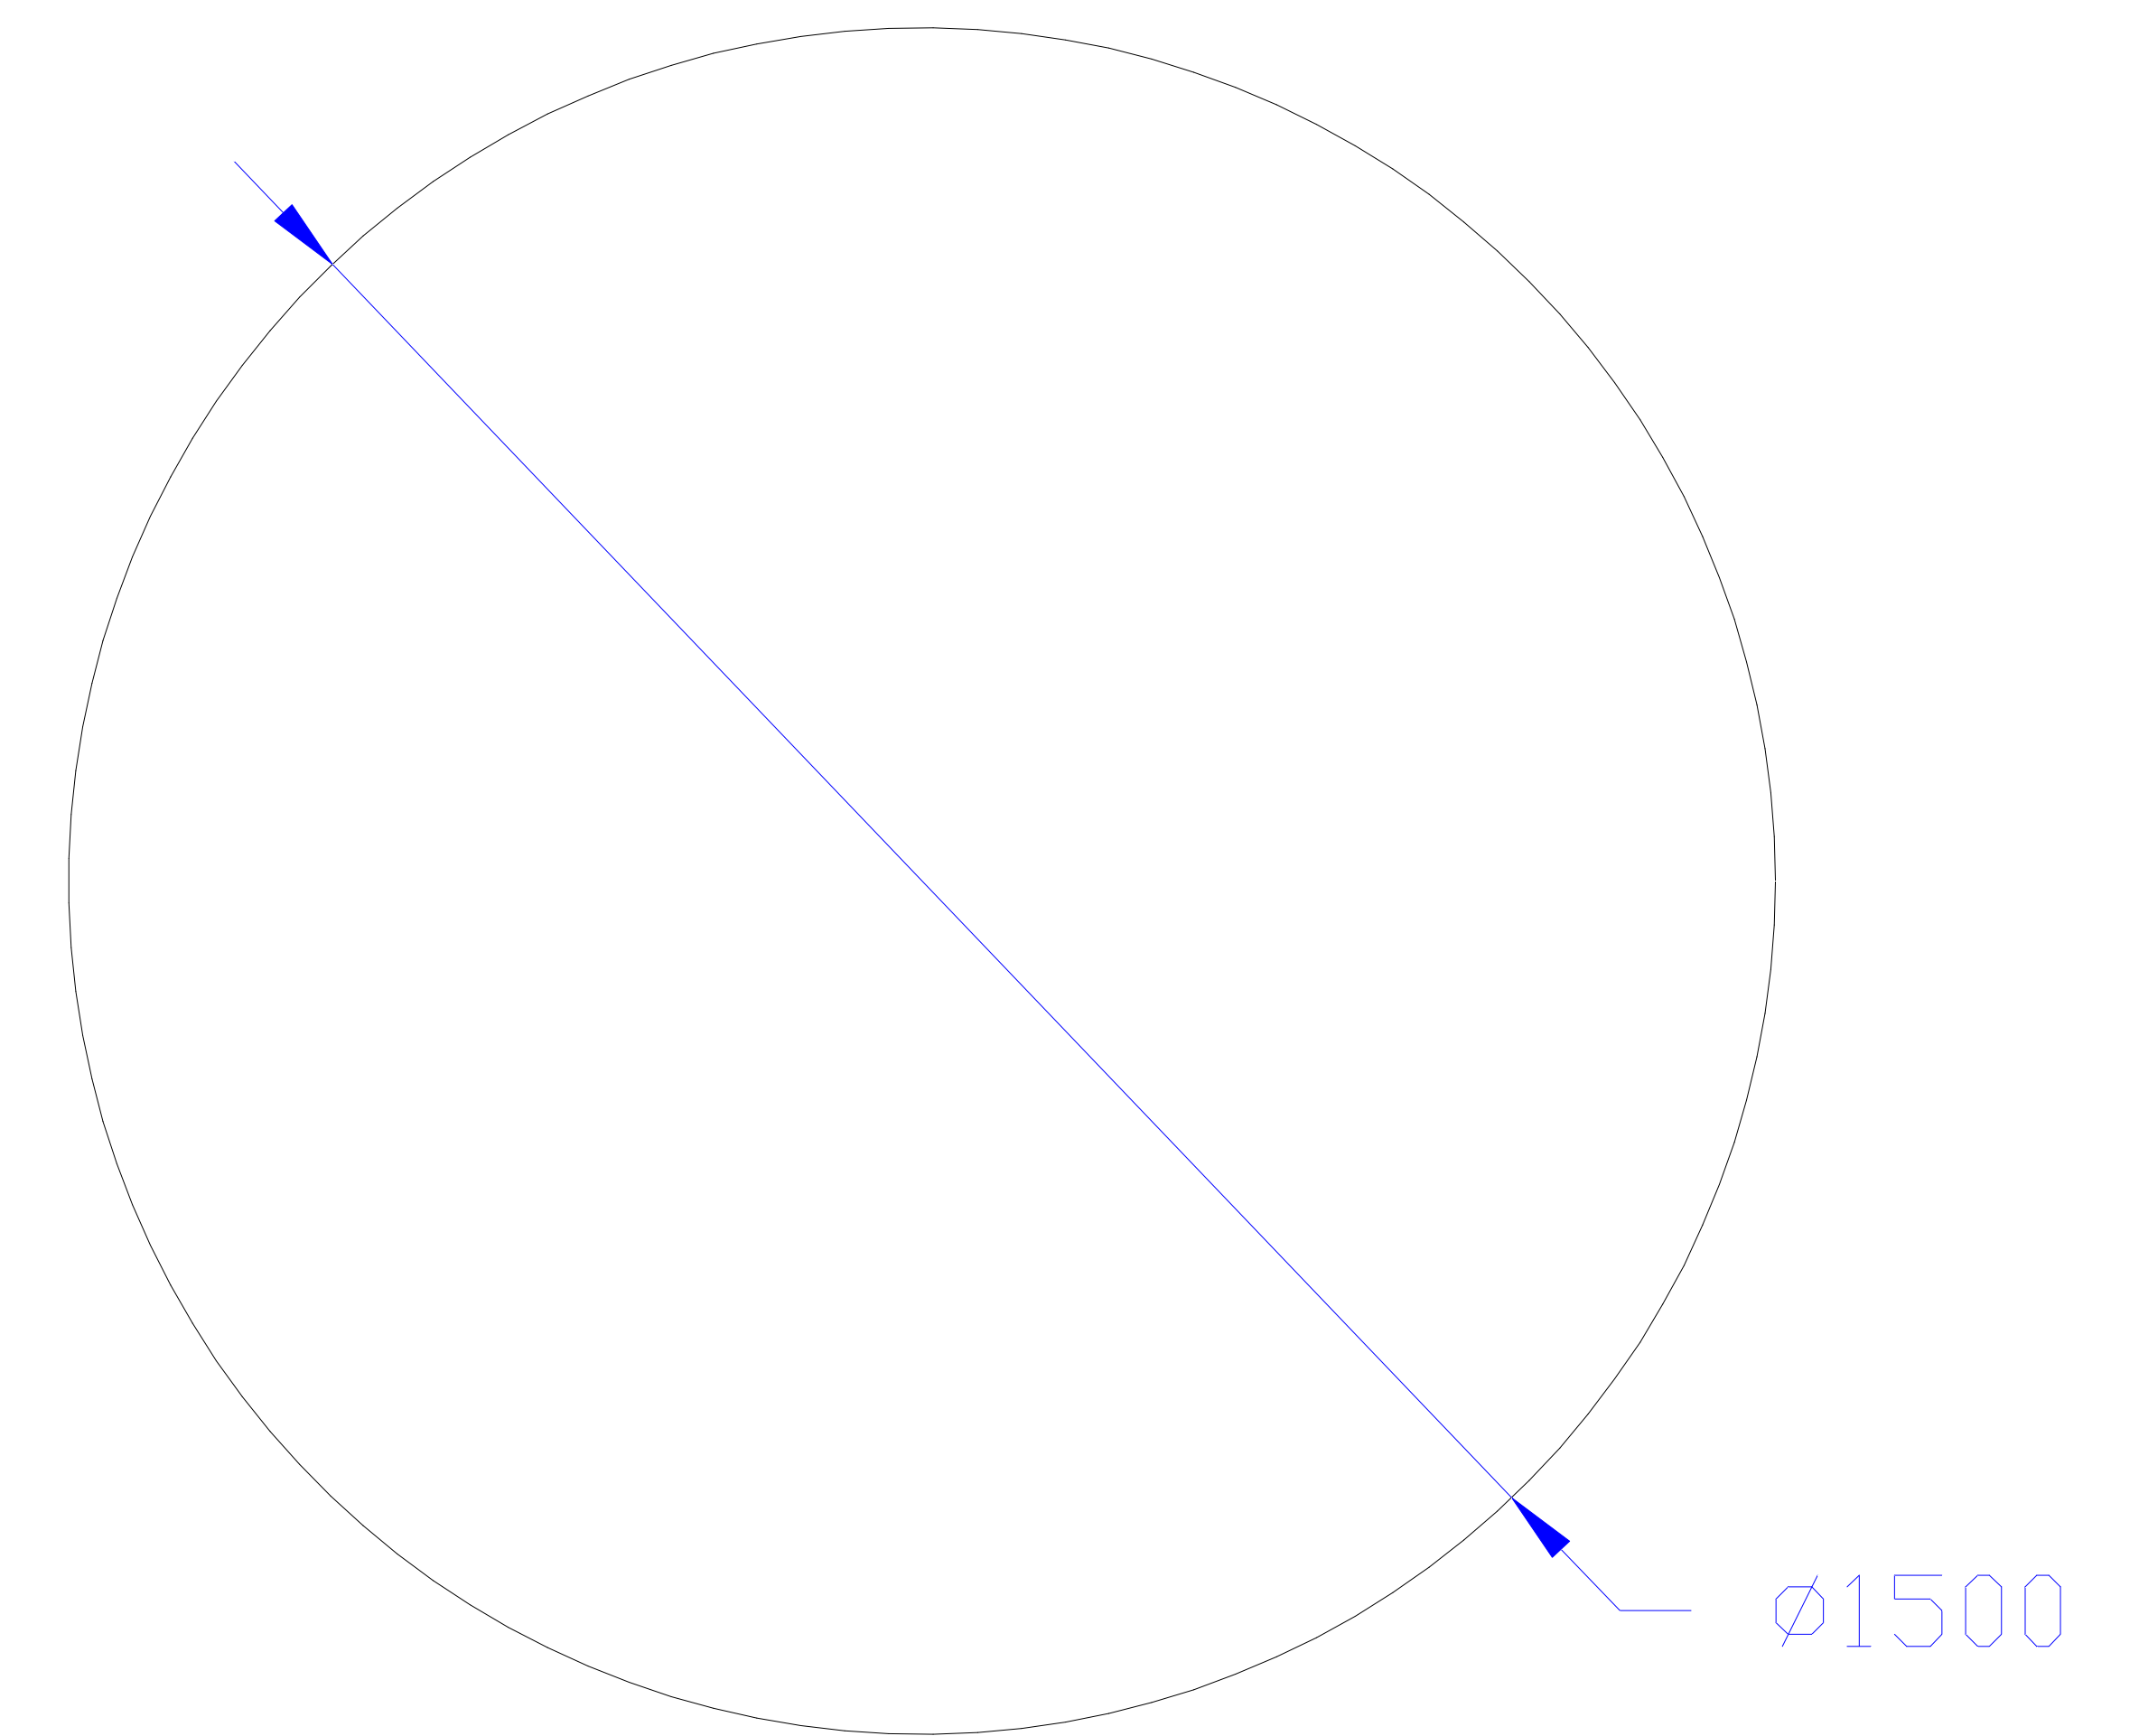


# 3t SEAFLEX MONO BUOYANCY UNIT (MBU)

SINGLE POINT LIFTING ATTACHMENT EYE.  
USE ONLY 3T SWL SHACKLES (6:1 SF)

ONE OF 2 x INFLATION/DEFLATION VALVES (IDVs)  
TERMINATES IN  $\frac{3}{4}$ " BSP MALE THREAD

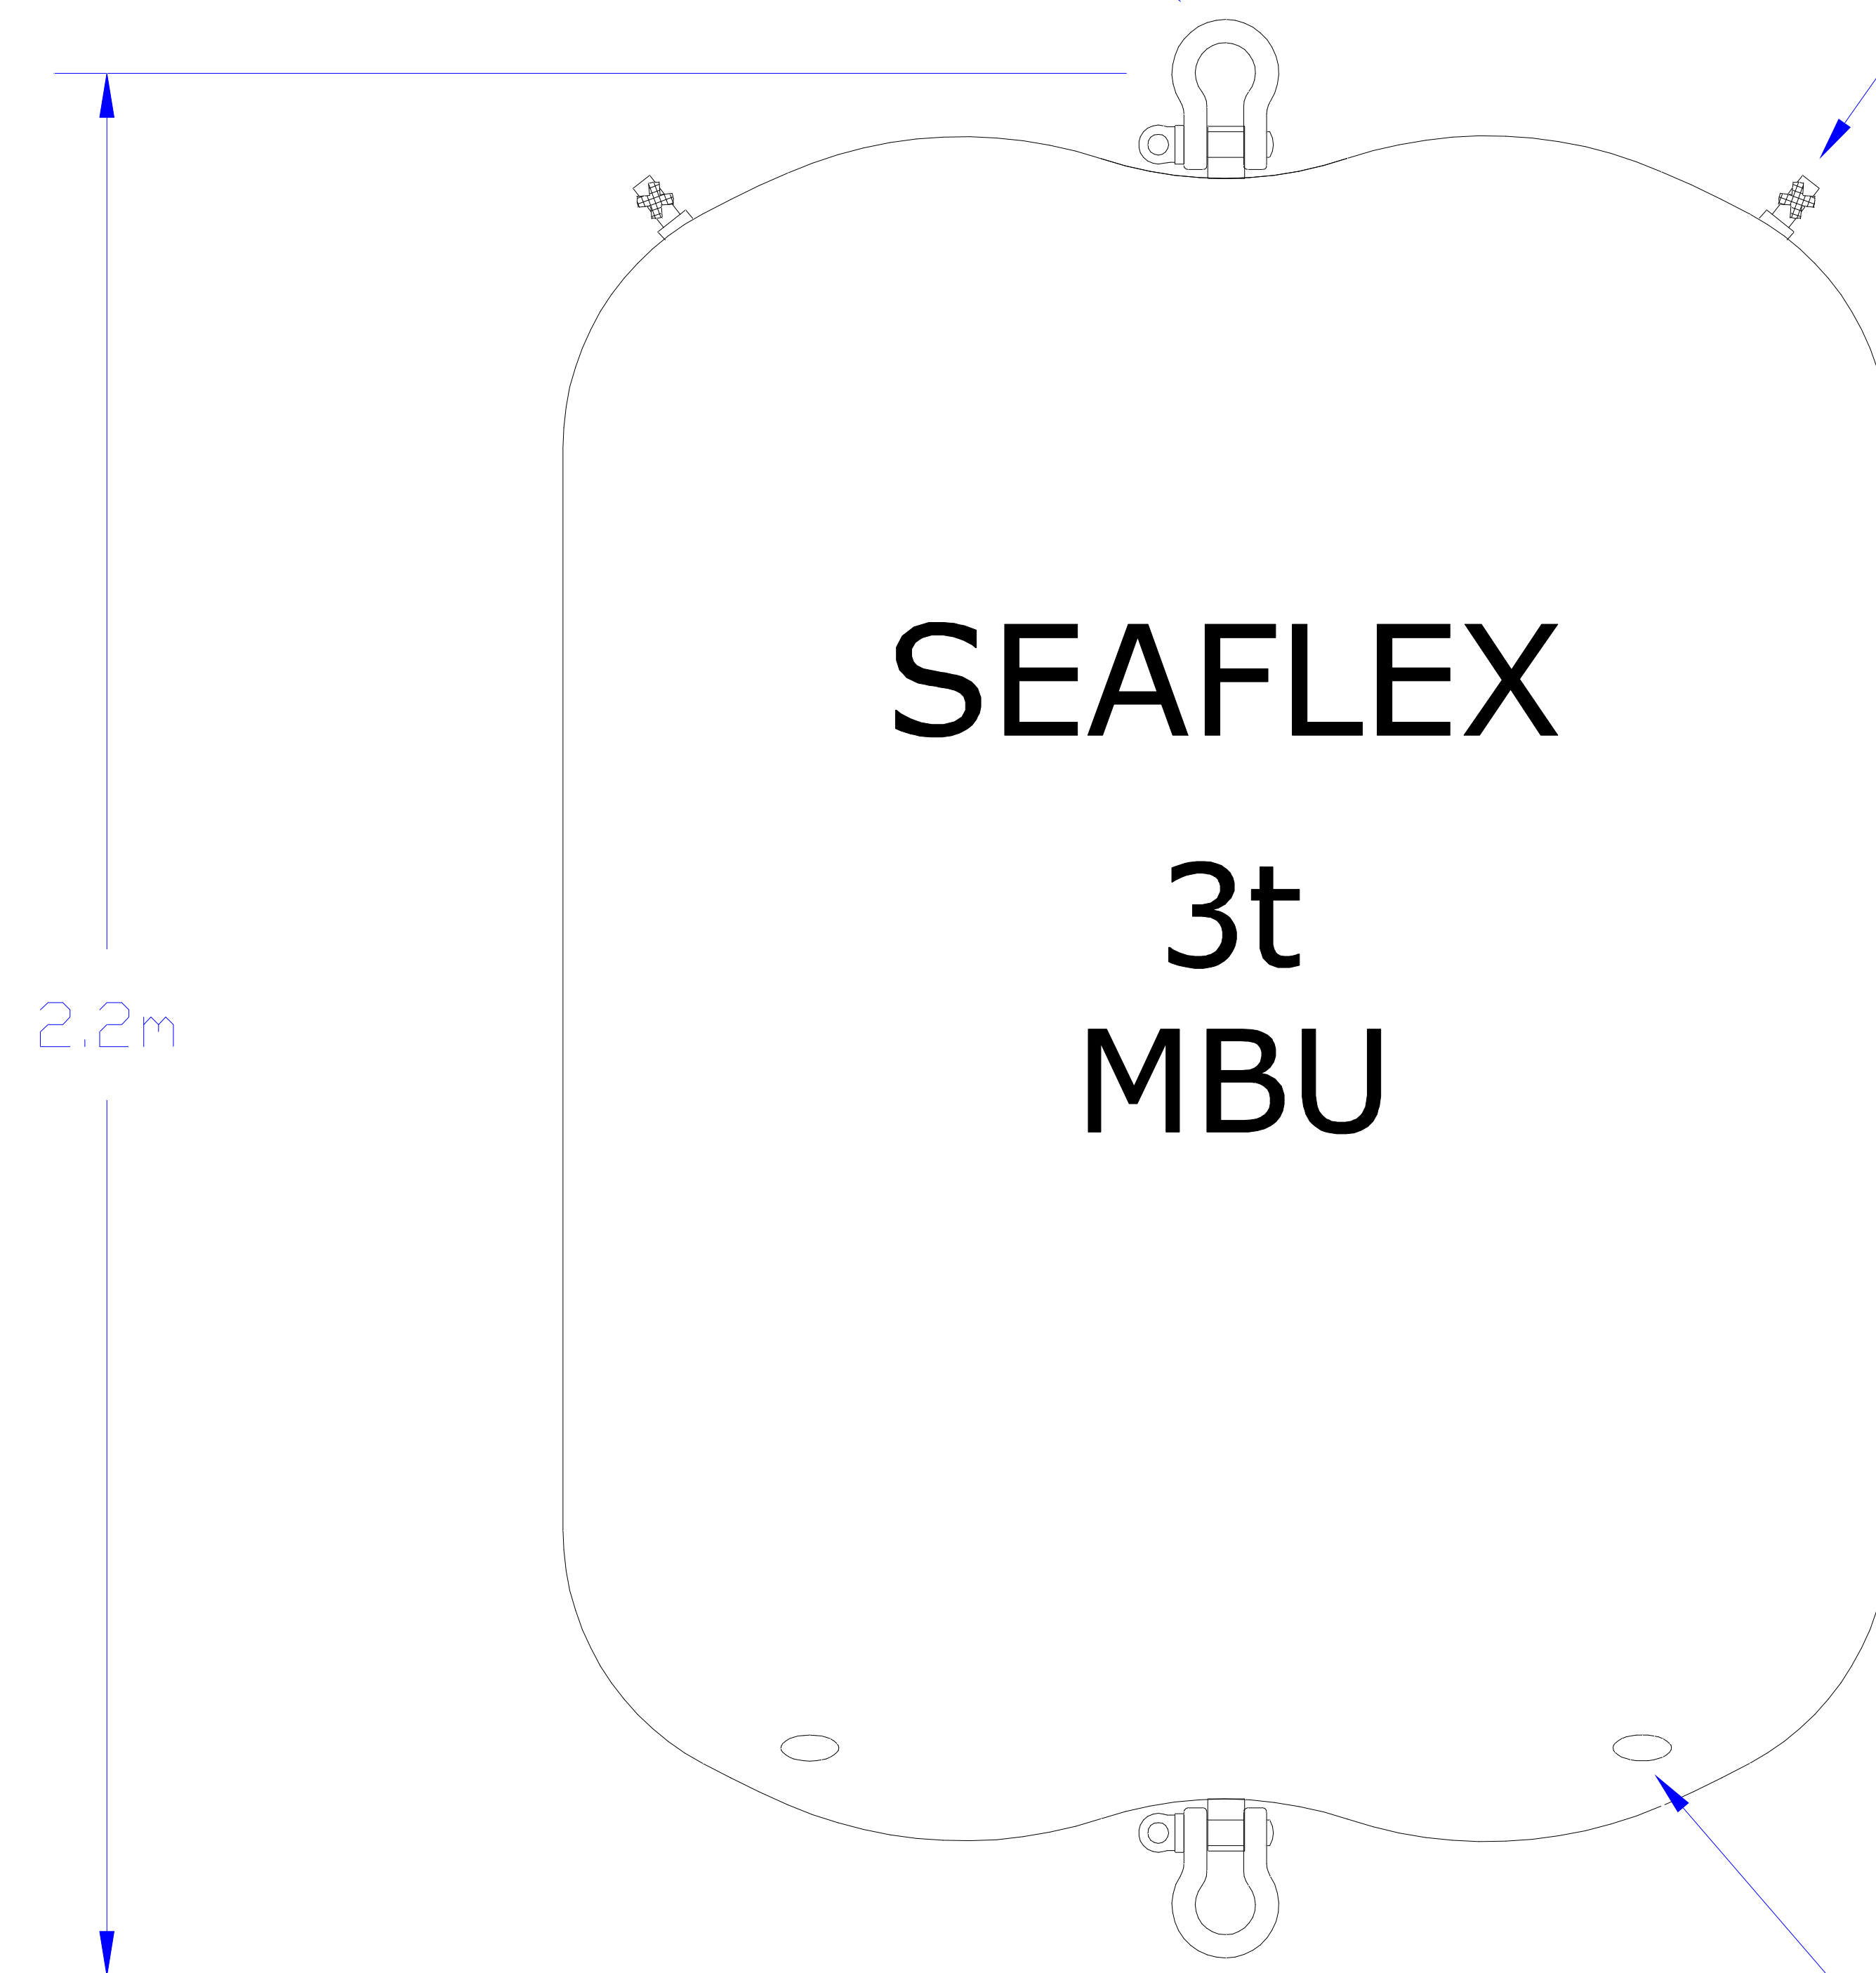

2 x PRESSURE RELIEF VALVES

SINGLE POINT LOAD ATTACHMENT EYE.  
USE ONLY 3T SWL SHACKLES (6:1 RF)

THE LIFTING SHACKLE ON THE TOP IS CONNECTED TO THE  
LOAD SHACKLE ON THE BOTTOM WITH A SWL OF 3t. SO  
A CRANE MAY BE USED TO LIFT THE MBU FROM THE TOP  
WITH A 3t LOAD SUSPENDED ON THE BOTTOM SHACKLE.

<b>3t MONO BUOYANCY UNIT</b>
Drg. No. 161204/1MLB Issue A
<b>SEAFLEX Ltd</b>
SAMUEL WHITES, COWES, ENGLAND, PO31 7RA. TEL: +441 983 290 525 FAX: +441 983 2905 853