

Thank you for your recent enquiry, we hope you find the following information useful. We look forward to hearing from you if Seaflex can be of service; please do not hesitate to contact us if you require further information or a prompt quotation.

FEATURES OF THE 5t ALB:


- All Seaflex Air Lift Bags (ALBs) comply with the currently accepted offshore standard; **IMCA D016-Air Lift Bags**. Units are designed and type tested to a safety factor in excess of the required 5:1 and constructed under **BS EN ISO 9001:2000** controlled procedures independently assessed and certified by **Lloyds Register Quality Assurance**.
- Log Books are issued with every ALB that contain all details, information and procedures required by IMCA D016- Air Lift Bags, and facilitate keeping the required records by the end user.
- Canopy fabric is high tensile PVC coated polyester with HF welded seams for maximum strength. This advanced 'performance fabric' has been well proven over the last ten years and maintains its strength, flexibility and weldability far longer than normal fabrics
- Eight strop bar attachment points distribute strop loads into the high tensile fabric canopy. The resulting smooth exterior and weight reduction make this unit the most widely used model by salvage companies and underwater civil engineers. Easy to attach and difficult to damage, clusters of three bags can be fixed to one point for concentrated lifting forces.
- The best materials, good design and meticulous manufacturing make Seaflex ALBs the first choice for end users requiring safety, ease of use and best value for through life cost.

COMPONENTS LIST:

COMPONENT PART No	COMPONENT DESCRIPTION	COMPONENT DESCRIPTION	QUANTITY PER BAG
SFX-5ALB/1	Canopy	PVC coated HT polyester 3x3 Panama 1650gms/m. HF welded seams.	1
SFX-5ALB/2	Masterlink	Fram 20B6 SWL 6.7t S.F 7.8:1	1
SFX-5ALB/3	Shackles	3.25t Galvanised Screw Pin Bow Shackles US FED Spec. RR-C-271	2
SFX-5ALB/4	Main Strops	Polyester Sling Webbing – 50mm	8
SFX-5ALB/5	Strop Bars	Seawater resistant cast alloy	8
SFX-5ALB/6	¾" Globe Valve filling & discharge	Non corrosive, quarter turn on/off Terminates ¾" BSP male thread	1
SFX-5ALB/7	Dump Valves	Twin A10(M) operated from single lanyard	1
SFX-5ALB/8	DV Lanyard	5mm polyester line with galvanised ballast ring	4.5m
SFX-5ALB/9	Detangler	HiViz yellow 25mm webbing	1
SFX-5ALB/10	Top Restraint	Strop bar and webbing strongpoint	1

SEAFLEX STANDARD PRODUCT

5t AIR LIFT BAG (ALB)

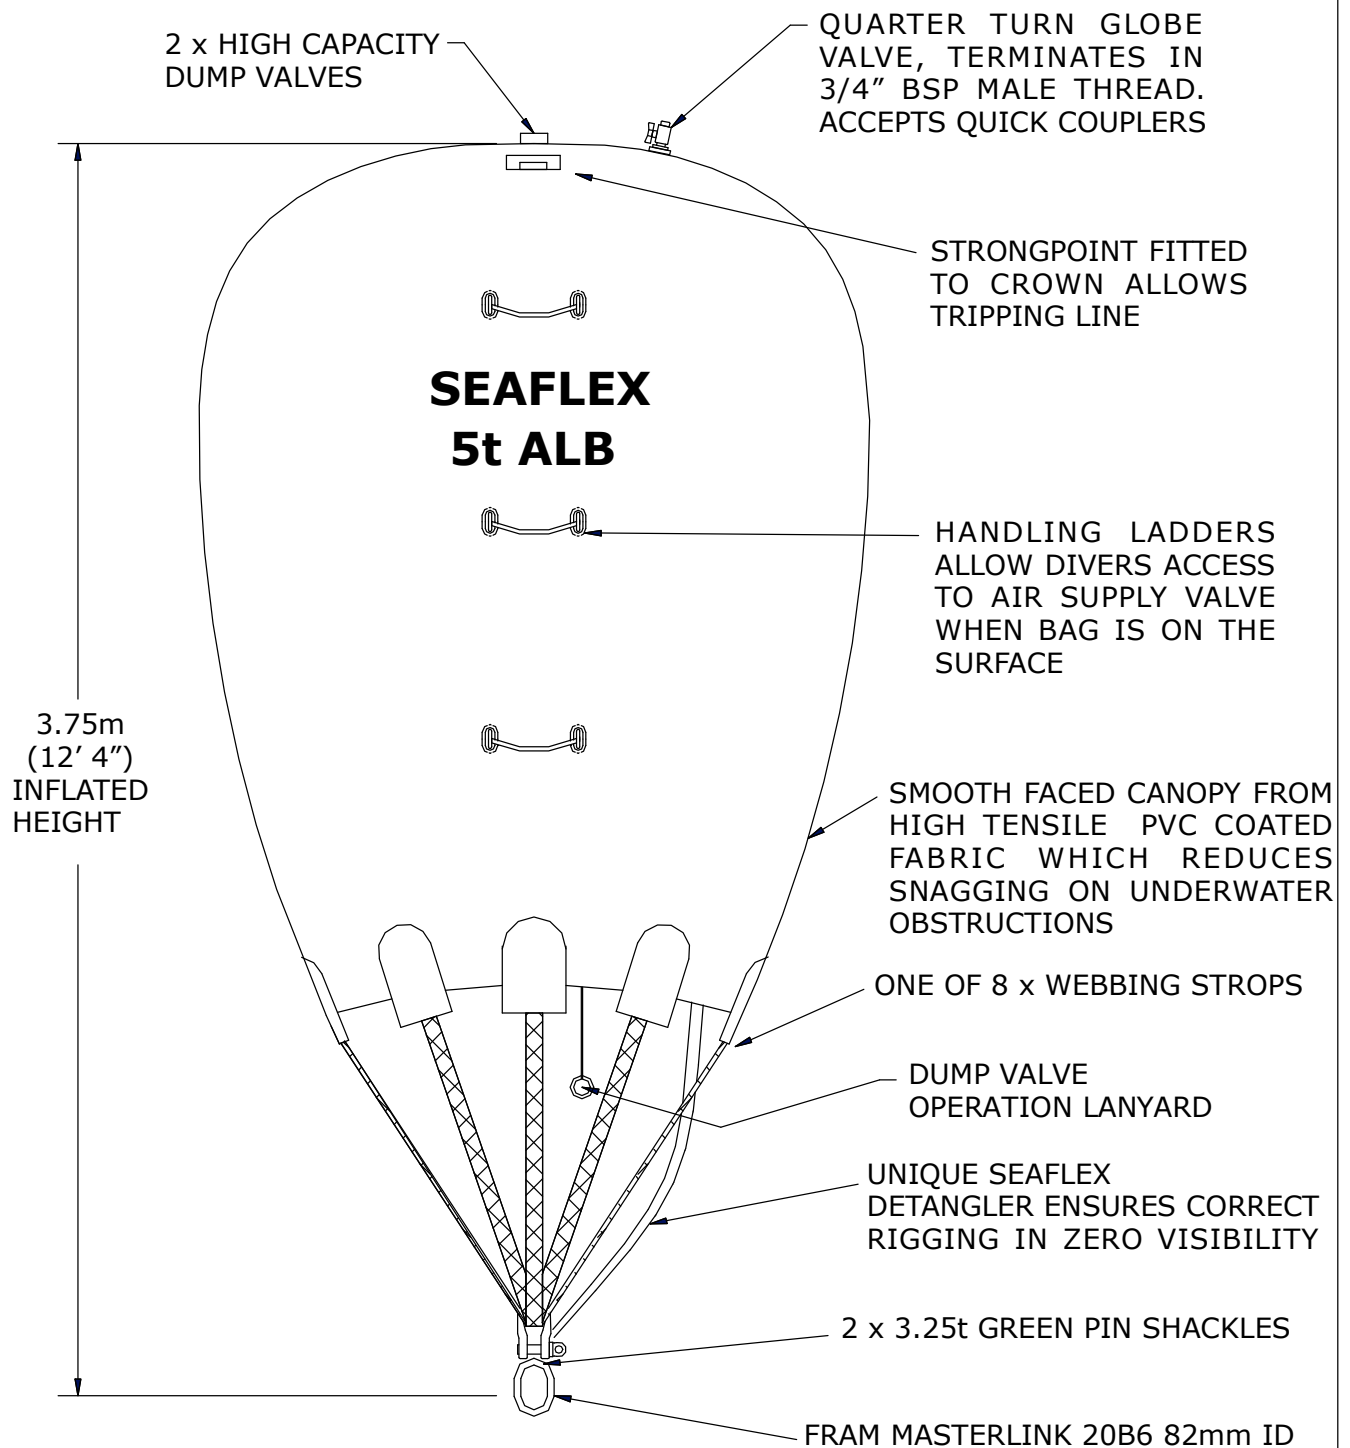

THE INTELLECTUAL CONTENT OF THIS DRAWING IS THE COPYRIGHT OF SEAFLEX LTD. CONTENTS ARE ACCURATE AT TIME OF GOING TO PRESS, BUT MAY CHANGE WITHOUT NOTICE

DO NOT SCALE

5t AIR LIFT BAG (ALB)

Drg. No. 171002/1MLB Issue A

SEAFLEX Ltd

SAMUEL WHITES, COWES, ENGLAND, PO31 7RA
 TEL: +441 983 290 525 FAX: +441 983 290 853