


5t SEAFLEX MONO BUOYANCY UNIT (MBU)

SINGLE POINT LIFTING ATTACHMENT EYE.
USE ONLY 4.75T SWL SHACKLES (6:1 SF)

ONE OF 2 x INFLATION/DEFLATION VALVES (IDVs)
TERMINATES IN $\frac{3}{4}$ " BSP MALE THREAD

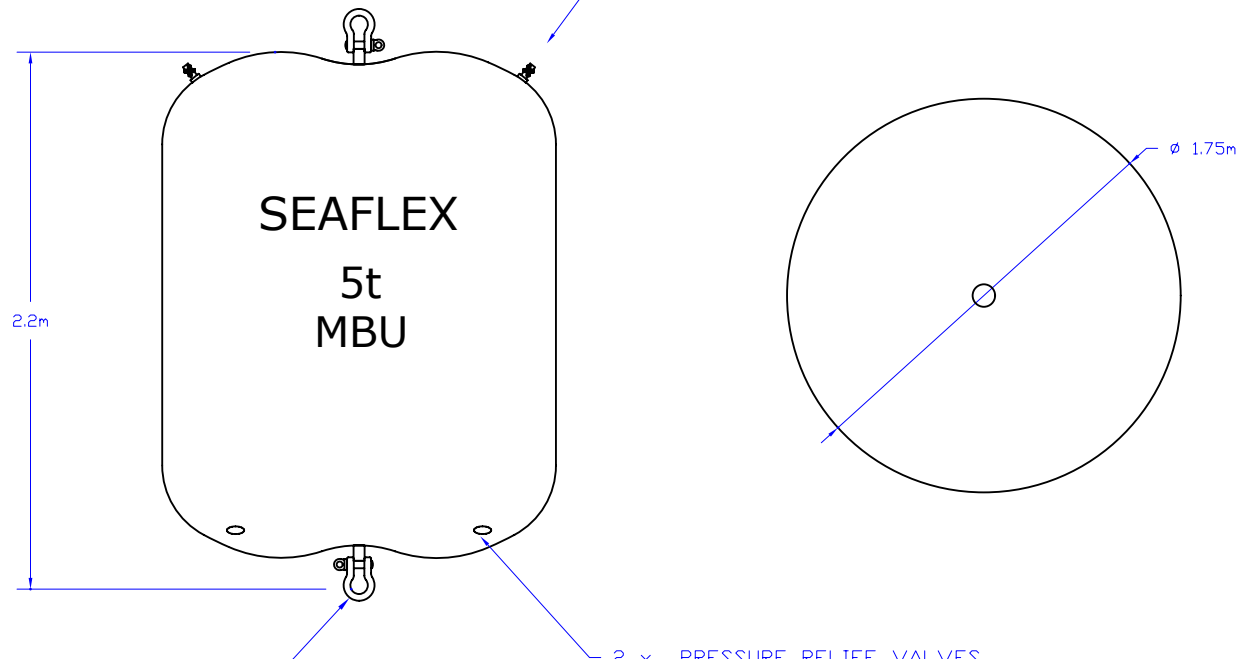

SINGLE POINT LOAD ATTACHMENT EYE.
USE ONLY 4.75T SWL SHACKLES (6:1 SF)

THE LIFTING SHACKLE ON THE TOP IS CONNECTED TO THE
LOAD SHACKLE ON THE BOTTOM WITH A SWL OF 4.75t. SO
A CRANE MAY BE USED TO LIFT THE MBU FROM THE TOP
WITH A 4.75t LOAD SUSPENDED ON THE BOTTOM SHACKLE.

5t MONO BUOYANCY UNIT

Drg. No. 131005/1MLB Issue A

SEAFLEX Ltd

SAMUEL WHITES, COWES, ENGLAND, PO31 7RA.
TEL: +441 983 290 525 FAX: +441 983 2905 853